


# Random access delay in a Quiz

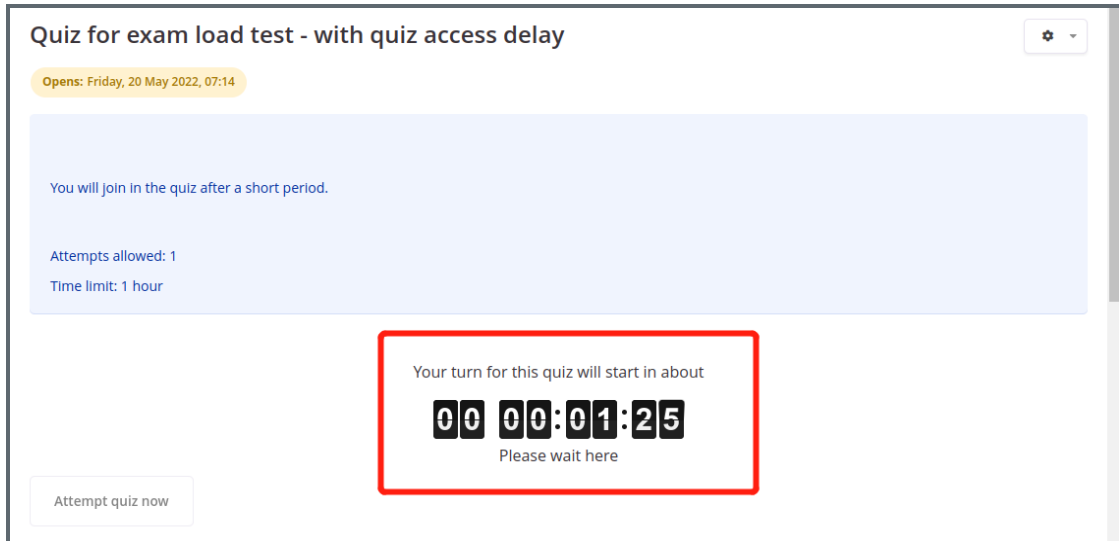

An example of random access delay

## Overview:

This guide will show you what the function of random delay access works.

## What to know:

This function can decrease the system pressure in high concurrency situation, such as exams in big classes, in order to provide a smooth Quiz experience to students.

## Table of Contents


[Step 1: Edit the Quiz settings](#)

[Step 2: Enable 'randomly access delay' function](#)

[How it works for students?](#)

### Step 1: Edit the Quiz settings


Click the 'Edit settings' of a Quiz activity.

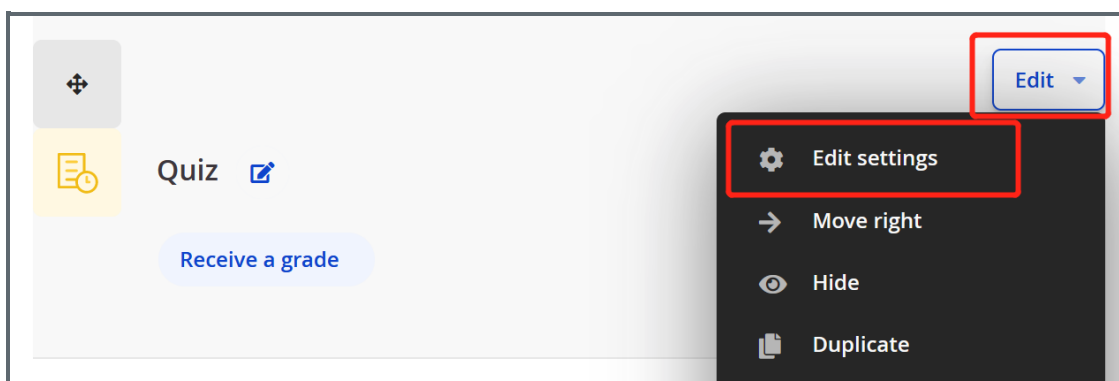

### Step 2: Enable 'randomly access delay' function

In the section of 'Extra restrictions on attempts', you need to enable the setting 'set a random access delay'.

This setting is disabled by default.

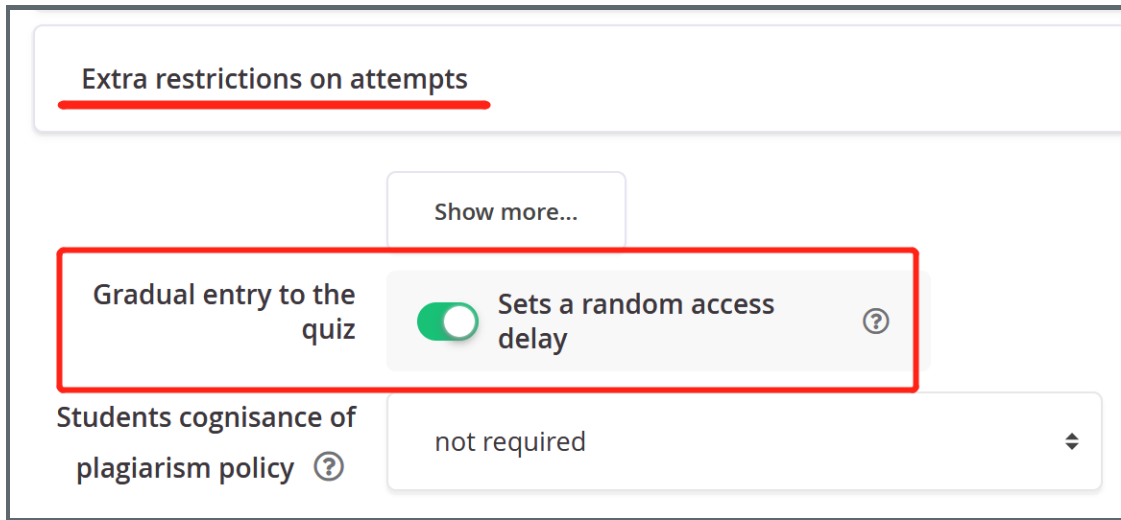

### How it works for students?

After enabling this setting, students will get a random access delay when they attempt the quiz.

Each students will get a random delay time, which is 2 minutes in maximum.

This function can decrease the system pressure in high concurrency situation, such as exams in big classes, in order to provide a smooth Quiz experience to students.

